



# Midea EVOX Family of Inverter Heat Pumps

Easy Upgrade Solutions  
for Every Family



# Not Your Ordinary Heat Pump

## Midea EVOX Family of Inverter Heat Pumps



**Outdoor Inverter  
Condenser**



1 A-Coil



2 Ceiling-Mounted  
Air Handler



3 Wall-Mounted  
Air Handler



4 Standard Air  
Handler

**Indoor Unit**


## EVOX Heat Pump for Flexible Heating Combinations



**ELECTRIC**

### Cold Climate Heat Pump


Midea EVOX Heat Pump  
100% heating output at -4°F



**ELECTRIC**

### Combo Heat

Midea EVOX Heat Pump+Auxiliary Heat Kit  
Activate the auxiliary heat strip to let the system rapidly  
reach the set temperature on extreme weather days



**ELECTRIC+ GAS**

### Dual Fuel

Midea EVOX Heat Pump+A-coil  
Pair the EVOX system with an existing furnace to let it deter-  
mine the best source of heat (gas or electric) on cold days to  
guarantee peak efficiency and comfort of your HVAC system

# Why Choose a Midea EVOX System?



## Designed for Cold Climate Conditions

**100% Heating Capacity at 5°F** with COP up to 2.0

**Continuous Operation as Cold as -22°F**

### NOT THE ORDINARY EFFICIENCY

**EXheat** Side Discharge Technology

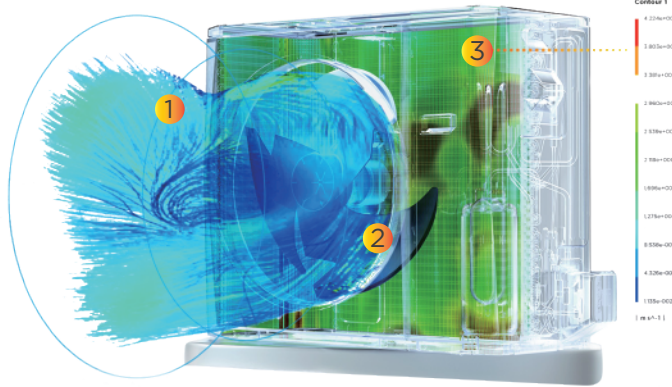

#### 1. Even Wind Field

Diffusing windshield to enlarge the air supply rate and reduce wind resistance



#### 2. Side-placed Wind Wheel

Allows optimal cross-ventilation between the wind field and thermal field



#### 3. Side-placed Wind Wheel and Vertical High Efficiency Heat Exchanger

The unit structure with side-placed wind wheel and vertical heat exchanger guarantee more uniform and efficient heat exchanging velocity across the entire heat exchanger surface. When temperature gets down, the system shows higher heat exchanging efficiency and provides stronger heating output..


### NOT THE ORDINARY PERFORMANCE

**M-POWERVI**

Enhanced Vapor Injection Compressor



Powerful Discharge Capacity

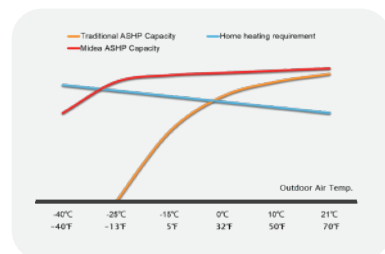

Enhanced Vapor Injection

### ELIGIBLE FOR MANY REBATE PROGRAMS

United States Up to

**\$2,000**

Meeting CEE's Highest Tier, eligible for up to 52,000 25C tax credits

Canada Up to

**\$5,000**

Eligible for the Canada Greener Homes Grant Program with a reimbursement of up to \$5,000 for retrofit


# Why Choose a Midea EVOX System?

## Save Money, Save Time

**BI-COMM TECHNOLOGY  
ALLOWS FOR COST-EFFECTIVE REPLACEMENT**




### 485 Communication Mode




EVOX Heat pump  
EVOX Air Handler  
Midea Wired Controller

OR



EVOX Heat Pump  
EVOX Air Handler  
Third-Party 24V Thermostat

### 24V Self-Adapt Mode

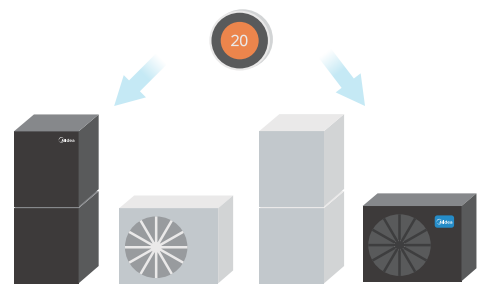

EVOX/Third-Party Heat Pump  
EVOX/Third-Party Air Handler  
Third-Party 24V Thermostat

## Premium Upgrade (485)

### Future Upgrade

Over-the-air update technology (OTA) for future comfort enhancements

### Wireless BACnet Capability

Integrates with new or existing Building Management Systems


## Flexible mix & match (24v)

Flexibly mix & match with most third-party indoor units, outdoor units, and thermostats, even without changing wiring or refrigerant lines

# Why Choose a Midea EVOX System?

## Save Money, Save Time

**CONSTANT AIRFLOW TECHNOLOGY 2.0  
ALLOWS FOR LESS INSTALLATION & SETUP TIME**

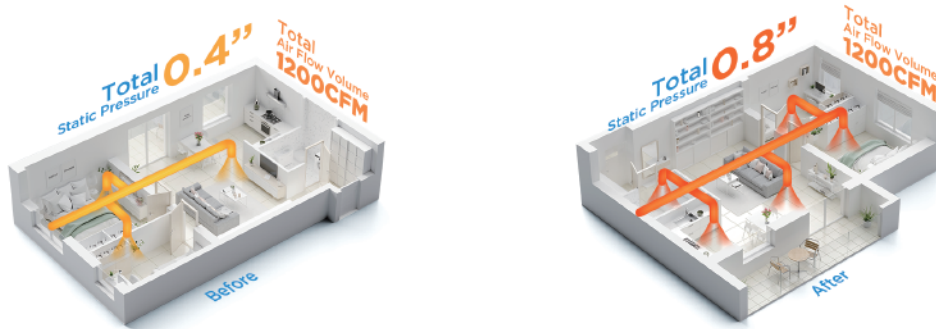


Different Ductwork Designs, Same Air Volume

### Normal Filter



Total Static Pressure **0.4"**  
Total Air Flow Volume **1200CFM**

### MERV 13



Total Static Pressure **0.8"**  
Total Air Flow Volume **1200CFM**

Diverse Filtration Needs, Same Air Volume

## ALLOWS CUSTOMIZED AIR VOLUME FOR THE WHOLE HOME

**A**


**Case 1:**  
A house in a southern hot region like Las Vegas needs faster cooling

**B**

**Case 2:**  
A limited space needs smaller airflow

**Case 3:**  
Some homeowners prefer a quieter environment

### CFM vs Total ESP

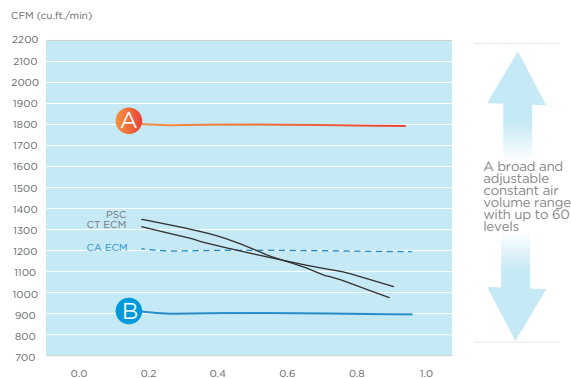

Total ESP (External Static Pressure)

### Engineer Mode



# EVOX Family Outdoor Inverter Condenser

## IDEAL FOR DIFFERENT CLIMATES

**GREAT LAKES & NORTHERN REGION**  
 Extreme Heat Pump (100% Heating Output at -4°F)  
 Combo Heat Extreme Heat Pump + Auxiliary Heater  
 Dual Fuel Extreme Heat Pump + A-Coil


**SOUTHWEST REGION**  
 Extreme Heat Pump (100% Heating Output at -4°F)  
 Dual Fuel Extreme Heat Pump + A-Coil

**SOUTHEAST REGION**  
 Midea Variable Speed Heat Pump

**1.5 - 5 Tons**

## EASY TO FIT IN ANY SPACE

Thinner design and lighter weight provides unmatched flexibility to fit in any unique home space.

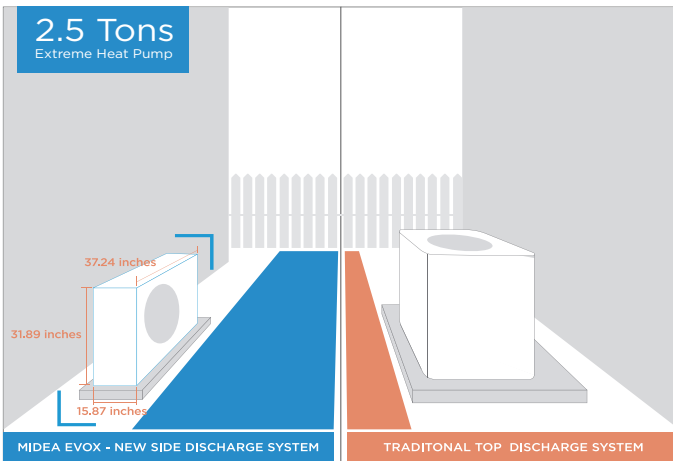

>> Fit more in your tech van or truck, with up to 4-5 EVOX units as opposed to 1-2 traditional units  
 >> Easy to bring to the installation site and install on pad; single fan unit can be transported by just a single worker



## ADVANCED COMPONENTS



New Generation Integrated Electronic Control




Small Tube Diameter Heat Exchanger with High Density Teeth



Low-vortex high-efficiency Silent fan blade



Compressor with New Slot Design

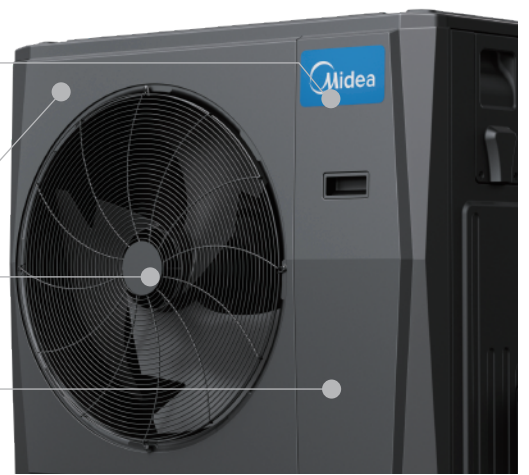

# What Makes **EVOX Easy?**



#### **OTA Upgrade**

Remote system upgrades for latest software updates



#### **Icheck**

Automatic diagnosis of the system issues



#### **Demand Response**

Public Electricity Loading Management



**Enlarged Operation Space & Added Diagnostic Board for ODUs**



**Separate 24V & s1/s2 terminals**



**A2L Disperse System**



**Multi-Voltage**



**Slimmer Outdoor Units**

# Perfect for North American Homes

Inverter Heat Pump & Standard Air Handler System



## CORE FEATURES OF STANDARD AIR HANDLER

SEER2 Up to  
19

EER2 Up to  
12.5

HSPF4 Up to  
10.2



**1.5-5 Tons**

**A** 1.5-2 tons:  
21" × 17-1/2" × 45"

**B** 2.5-3 tons:  
21" × 21" × 49"

**C** 4-5 tons:  
21" × 24-1/2" × 53"


## FITS DIFFERENT INSTALLATION SPACES

4-Way Installation (Left/Right/Up/Down)





## ADVANCED COMPONENTS

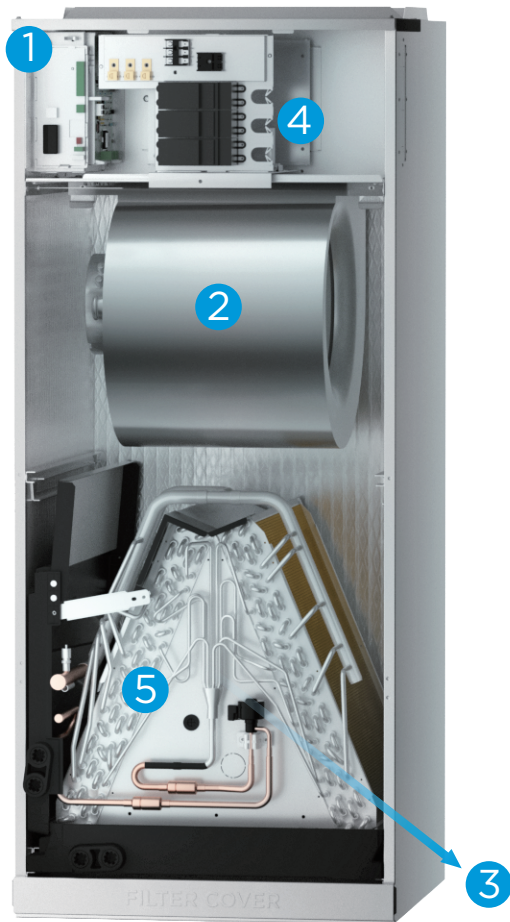

1. Compatible with 485 or 24V: automatically identifying the control mode, no need for manual conversion.
2. Constant CFM ECM motor provides consistent airflow up to 0.8 in. w.c.
3. Electronic expansion valve (EEV) control: better throttling for highly efficient operation.
4. Optional auxiliary heat kits available up to 25kW.
5. All-Aluminum Coil.
6. Quiet Operation - down to 35 dB(A) level.

## EASY TO SERVICE





### Streamlined Trouble-shooting

Easily accessible error code display

### Easy Access

Remove two screws for access to the electrical board, blower, heater

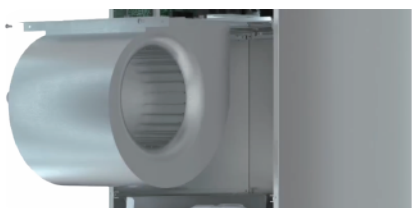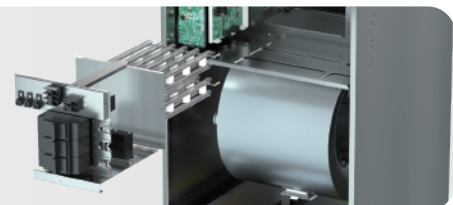


### Slide-Out Fan

Easily remove the fan motor for straightforward maintenance

### Magnetic Filter Cover

One click for filter access

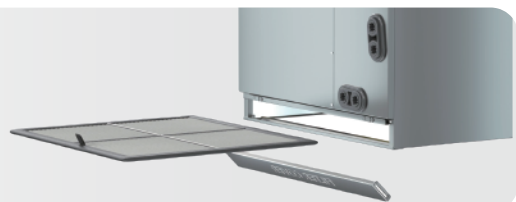

# EVOX Air Handler Extreme Heat\_Specification

## Up to 19 SEER2


Model	Indoor Unit		MAUHE-H18B-2A	MAUHE-H24B-2A	MAUHE-H30B-2A	MAUHE-H36B-2A	MAUHE-H48B-2A	MAUHE-H60B-2A
	Outdoor Unit		MOIHE-H18B-2A	MOIHE-H24B-2A	MOIHE-H30B-2A	MOISE-H36B-2A	MOIHE-H48B-2A	MOIHE-H60B-2A
<b>Performance</b>								
Power Supply	IDU	V, Ph, Hz	115/208/230, 1, 60	115/208/230, 1, 60	115/208/230, 1, 60	115/208/230, 1, 60	115/208/230, 1, 60	115/208/230, 1, 60
	ODU	V, Ph, Hz	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
SEER2 (AHRI 210/240 - 2023)	Cooling Capacity	Btu/h	18,000	23,000	30,000	36,000	48,000	54,000
	Heating Capacity	Btu/h	19,000	24,000	34,000	37,000	50,000	56,000
	SEER2	Btu/W	19	18.3	16.8	17.4	16.5	16
	EER2	Btu/W	12.5	11.7	11.7	11.7	10.5	10
	HSPF4	Btu/W	9.7	10	10	10.2	9.5	9
Heating at 5°F (-15°C)	Rated capacity	Btu/h	18,000	21,600	32,600	39,000	46,000	52,000
	COP	W/W	2	1.87	1.96	1.9	1.9	1.8
<b>Indoor unit</b>								
Air Flow Volume	Turbo/Hi/Mi/Lo/Si	CFM	618/577/530/489/489	824/759/695/630/630	989/895/806/712/712	1189/1083/971/865/865	1601/1472/1283/1095/1095	1807/1583/1360/1136/1136
Noise Level	Turbo/Hi/Mi/Lo/Si	dB(A)	41/41/39/33/33	44/44/42/28/28	47/46/43/27/27	49/48/46/26/26	52/52/50/34/34	55/52/50/35/35
Net Dimension	WxDxH	mm	534×445×1143	534×445×1143	534×534×1245	534×534×1245	534×622×1346	534×622×1346
	WxDxH	inch	21×17-1/2×45	21×17-1/2×45	21×21×49	21×21×49	21×24-1/2×53	21×24-1/2×53
Packing Dimension	WxDxH	mm	675×530×1235	675×530×1235	675×620×1335	675×620×1335	710×680×1435	710×680×1435
	WxDxH	inch	26-5/8×20-7/8×48-5/8	26-5/8×20-7/8×48-5/8	26-5/8×24-3/8×52-1/2	26-5/8×24-3/8×52-1/2	28×26-3/4×56-1/2	28×26-3/4×56-1/2
Net/Gross Weight		kg	48/58.7	47.9/57.8	58.6/70.6	58.6/70.6	58.6/70.6	59.2/70.9
		lbs	106/129	106/127	129/156	129/156	129/156	131/156

# EVOX Air Handler Regular Heat\_Specification

## Up to 18.8 SEER2

Model	Indoor Unit		MAUHE-H18B-2A	MAUHE-H24B-2A	MAUHE-H30B-2A	MAUHE-H36B-2A	MAUHE-H48B-2A	MAUHE-H60B-2A
	Outdoor Unit		MOIBE-H18B-2A	MOIBE-H24B-2A	MOIBE-H30B-2A	MOIBE-H36B-2A	MOIBE-H48B-2A	MOIBE-H60B-2A
<b>Performance</b>								
Power Supply	IDU	V, Ph, Hz	115/208/230, 1, 60	115/208/230, 1, 60	115/208/230, 1, 60	115/208/230, 1, 60	115/208/230, 1, 60	115/208/230, 1, 60
	ODU	V, Ph, Hz	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
SEER2 (AHRI 210/240 - 2023)	Cooling Capacity	Btu/h	18,000	24,000	30,000	36,000	48,000	54,000
	Heating Capacity	Btu/h	18,000	26,000	31,000	36,000	48,000	54,000
	SEER2	Btu/W	18.8	18.1	17.0	16.1	16.0	15.2
	EER2	Btu/W	11.0	11.0	10.7	10.0	10.0	8.6
	HSPF4	Btu/W	9	10	9	9	9	8
Heating at 5°F (-15°C)	Rated capacity	Btu/h	11,200	21,600	19,100	27,000	38,000	38,000
	COP	W/W	2.0	1.9	2.0	2.0	1.9	1.8
<b>Indoor unit</b>								
Air Flow Volume	Turbo/Hi/Mi/Lo/Si	CFM	618/577/530/489/489	824/759/695/630/630	989/895/806/712/712	1189/1083/971/865/865	1601/1472/1283/1095/1095	1807/1583/1360/1136/1136
Noise Level	Turbo/Hi/Mi/Lo/Si	dB(A)	44/43/41/33/33	44/44/42/28/28	46/46/42/29/29	48/48/45/28/28	53/53/50/44/44	56/52/49/35/35
Net Dimension	WxDxH	mm	534×445×1143	534×445×1143	534×534×1245	534×534×1245	534×622×1346	534×622×1346
	WxDxH	inch	21×17-1/2×45	21×17-1/2×45	21×21×49	21×21×49	21×24-1/2×53	21×24-1/2×53
Packing Dimension	WxDxH	mm	675×530×1235	675×530×1235	675×620×1335	675×620×1335	710×680×1435	710×680×1435
	WxDxH	inch	26-5/8×20-7/8×48-5/8	26-5/8×20-7/8×48-5/8	26-5/8×24-3/8×52-1/2	26-5/8×24-3/8×52-1/2	28×26-3/4×56-1/2	28×26-3/4×56-1/2
Net/Gross Weight		kg	48/57.5	47.9/57.8	58.5/69.6	58.7/69.8	73.9/86.6	73.9/86.6
		lbs	106/127	106/127	129/153	129/154	163/191	163/191

# EVOX Family Core Features





## Compatible with the Existing Gas Furnace

Inverter Heat Pump & A-Coil System




### UPGRADE YOUR HEATING AND COOLING FOR PEAK EFFICIENCY & COMFORT

During Winter: Dual-Fuel Capability



#### Cold



Experience comfort and efficiency of heat pump.



#### Freezing

When the temperature drops below -22°F, use the gas furnace as an available backup.

During Summer: Efficient Cooling

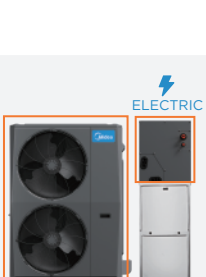

#### Hot

Experience ultimate comfort with highly efficient and powerful cooling capabilities.

## CORE FEATURES OF A-COIL



SEER2 Up to  
16.5


EER2 Up to  
11.7

### 1.5-5 Tons


#### The Most Comprehensive Size Options

- A** 1.5-2 tons : 14-1/2" × 21" × 18"  
2.5-3 tons: 14-1/2" × 21" × 23-1/2"
- B** 1.5-2 tons : 17-1/2" × 21" × 18"  
2.5-3 tons: 17-1/2" × 21" × 23-1/2"
- C** 2.5-3 tons : 21" × 21" × 23-1/2"  
4-5 tons : 21" × 21" × 27-1/2"
- D** 4-5 tons : 24-1/2" × 21" × 28"

## VERSATILE APPLICATIONS

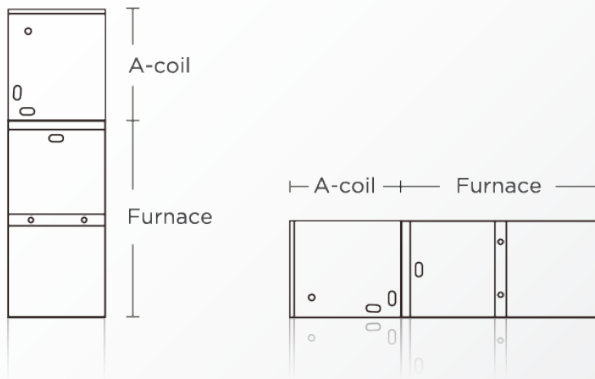

The **Flexible**  
Multipoise Design



**Uncased**  
& Cased

# A-COIL Extreme Heat\_Specification

Model	Indoor Unit		MAAHE-H24B-AA	MAAHE-H24B-BA	MAAHE-H24B-AA	MAAHE-H24B-BA	MAAHE-H36B-AA	MAAHE-H36B-BA	MAAHE-H36B-CA	
	Outdoor Unit		MOIHE-H18B-2A	MOIHE-H18B-2A	MOIHE-H24B-2A	MOIHE-H24B-2A	MOIHE-H30B-2A	MOIHE-H30B-2A	MOIHE-H30B-2A	
<b>Performance</b>										
<b>Power Supply</b>	V, Ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	
<b>SEER2 (AHRI 210/240 - 2023)</b>	Cooling Capacity	Btu/h	18,000	18,000	24,000	24,000	30,000	30,000	30,000	
	Heating Capacity	Btu/h	19,000	19,000	25,000	25,000	30,000	30,000	30,000	
	SEER2	Btu/W	16.0	16.0	16.5	16.5	14.3	15.2	15.2	
	EER2	Btu/W	11.7	11.7	10	10	8.5	10	10	
	HSPF4	Btu/W	8.5	8.5	8.5	8.5	7.5	8.5	8.5	
<b>Heating at 5°F (-15°C)</b>	Rated capacity	Btu/h	15,000	20,000	20,000	20,000	25,000	27,000	27,000	
	COP	W/W	1.8	1.8	1.8	1.8	1.75	1.8	1.8	
<b>Indoor unit</b>										
<b>Net Dimension</b>	WxDxH	mm	368×534×457	445×534×457	368×534×457	445×534×457	368×534×599	445×534×599	534×534×609	
	WxDxH	inch	14-1/2×21×18	17-1/2×21×18	14-1/2×21×18	17-1/2×21×18	14-1/2×21×23-1/2	17-1/2×21×23-1/2	21×21×23-1/2	
<b>Packing Dimension</b>	WxDxH	mm	450×665×525	520×665×515	450×665×525	520×665×515	450×665×660	520×665×645	610×665×670	
	WxDxH	inch	17-3/4×26-1/8×20-5/8	17-5/8×26-1/8×20-1/4	17-3/4×26-1/8×20-5/8	17-5/8×26-1/8×20-1/4	17-3/4×26-1/8×26-1/8	17-5/8×26-1/8×25-3/8	20×26-1/8×26-3/8	
<b>Net/Gross Weight</b>			kg	19.4/23.6	18.9/21.1	18.9/21.1	19.4/23.6	30.2/35	27.3/31.3	27.3/31.3
			lbs	43/52	42/47	42/47	43/52	67/77	60/69	60/69

Model	Indoor Unit		MAAHE-H36B-AA	MAAHE-H36B-BA	MAAHE-H36B-CA	MAAHE-H60B-CA	MAAHE-H60B-DA	MAAHE-H60B-CA	MAAHE-H60B-DA	
	Outdoor Unit		MOIHE-H36B-2A	MOIHE-H36B-2A	MOIHE-H36B-2A	MOIHE-H48B-2A	MOIHE-H48B-2A	MOIHE-H60B-2A	MOIHE-H60B-2A	
<b>Performance</b>										
<b>Power Supply</b>	V, Ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	
<b>SEER2 (AHRI 210/240 - 2023)</b>	Cooling Capacity	Btu/h	32,000	36,000	36,000	45,000	45,000	52,000	54,000	
	Heating Capacity	Btu/h	33,000	38,000	38,000	48,000	48,000	55,000	54,000	
	SEER2	Btu/W	14.3	15.2	15.2	15.2	14.3	15.2	14.3	
	EER2	Btu/W	8.5	10	10	10	8.6	10	8.6	
	HSPF4	Btu/W	7.5	8.5	8.5	8.5	7.5	8.5	7.5	
<b>Heating at 5°F (-15°C)</b>	Rated capacity	Btu/h	27,000	36,000	36,000	42,000	42,000	45,000	42,000	
	COP	W/W	1.8	1.8	1.8	1.8	1.8	1.8	1.8	
<b>Indoor unit</b>										
<b>Net Dimension</b>	WxDxH	mm	368×534×599	445×534×599	534×534×609	533×534×709	622×534×711	533×534×709	622×534×711	
	WxDxH	inch	14-1/2×21×23-1/2	17-1/2×21×23-1/2	21×21×23-1/2	21×21×27-1/2	24-1/2×21×28	21×21×27-1/2	24-1/2×21×28	
<b>Packing Dimension</b>	WxDxH	mm	450×665×660	520×665×645	610×665×670	610×665×775	705×665×770	610×665×775	705×665×770	
	WxDxH	inch	17-3/4×26-1/8×26-1/8	17-5/8×26-1/8×25-3/8	20×26-1/8×26-3/8	24×26×30-1/2	27-3/4×26-1/8×30-1/4	24×26×30-1/2	27-3/4×26-1/8×30-1/4	
<b>Net/Gross Weight</b>			kg	30.2/35	27.3/31.3	27.3/31.3	30.2/35	39.3/44.6	30.2/35	39.3/44.6
			lbs	67/77	60/69	60/69	67/77	87/98	67/77	87/98

# A-COIL Regular Heat\_Specification

Model	Indoor Unit		MAAHE-H24B-AA	MAAHE-H24B-BA	MAAHE-H24B-AA	MAAHE-H24B-BA	MAAHE-H36B-AA	MAAHE-H36B-BA	MAAHE-H36B-CA	
	Outdoor Unit		MO1BE-H18B-2A	MO1BE-H18B-2A	MO1BE-H24B-2A	MO1BE-H24B-2A	MO1BE-H30B-2A	MO1BE-H30B-2A	MO1BE-H30B-2A	
<b>Performance</b>										
<b>Power Supply</b>	V, Ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	
<b>SEER2 (AHRI 210/240 - 2023)</b>	Cooling Capacity	Btu/h	18,000	18,000	24,000	24,000	28,000	30,000	30,000	
	Heating Capacity	Btu/h	18,000	18,000	25,000	25,000	28,000	30,000	30,000	
	SEER2	Btu/W	16	16	16	16	14.3	14.3	14.3	
	EER2	Btu/W	10	10	10	10	8.5	8.5	8.5	
	HSPF4	Btu/W	8.5	8.5	8.5	8.5	7.5	7.5	7.5	
<b>Heating at 5°F (-15°C)</b>	Rated capacity	Btu/h	11,000	11,000	20,000	20,000	15,000	17,000	17,000	
	COP	W/W	1.8	1.8	1.8	1.8	1.7	1.8	1.8	
<b>Indoor unit</b>										
<b>Net Dimension</b>	WxDxH	mm	368×534×457	445×534×457	368×534×457	445×534×457	368×534×599	445×534×599	534×534×609	
	WxDxH	inch	14-1/2×21×18	17-1/2×21×18	14-1/2×21×18	17-1/2×21×18	14-1/2×21×23-1/2	17-1/2×21×23-1/2	21×21×23-1/2	
<b>Packing Dimension</b>	WxDxH	mm	450×665×525	520×665×515	450×665×525	520×665×515	450×665×660	520×665×645	610×665×670	
	WxDxH	inch	17-3/4×26-1/8×20-5/8	17-5/8×26-1/8×20-1/4	17-3/4×26-1/8×20-5/8	17-5/8×26-1/8×20-1/4	17-3/4×26-1/8×26-1/8	17-5/8×26-1/8×25-3/8	20×26-1/8×26-3/8	
<b>Net/Gross Weight</b>			kg	19.4/23.6	18.9/21.1	18.9/21.1	19.4/23.6	30.2/35	27.3/31.3	27.3/31.3
			lbs	43/52	42/47	42/47	43/52	67/77	60/69	60/69

Model	Indoor Unit		MAAHE-H36B-AA	MAAHE-H36B-BA	MAAHE-H36B-CA	MAAHE-H60B-CA	MAAHE-H60B-DA	MAAHE-H60B-CA	MAAHE-H60B-DA	
	Outdoor Unit		MO1BE-H36B-2A	MO1BE-H36B-2A	MO1BE-H36B-2A	MO1BE-H48B-2A	MO1BE-H48B-2A	MO1BE-H60B-2A	MO1BE-H60B-2A	
<b>Performance</b>										
<b>Power Supply</b>	V, Ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	
<b>SEER2 (AHRI 210/240 - 2023)</b>	Cooling Capacity	Btu/h	32,000	35,000	35,000	45,000	45,000	50,000	49,000	
	Heating Capacity	Btu/h	32,000	36,000	36,000	45,000	45,000	50,000	49,000	
	SEER2	Btu/W	14.3	14.3	14.3	14.5	14.3	14.3	14.3	
	EER2	Btu/W	8.5	8	8	8	8	8.5	8.5	
	HSPF4	Btu/W	7.5	7.5	7.5	7.5	7.5	7.5	7.5	
<b>Heating at 5°F (-15°C)</b>	Rated capacity	Btu/h	22,000	25,000	25,000	32,000	30,000	34,000	34,000	
	COP	W/W	1.65	1.75	1.75	1.75	1.75	1.75	1.75	
<b>Indoor unit</b>										
<b>Net Dimension</b>	WxDxH	mm	368×534×599	445×534×599	534×534×609	533×534×709	622×534×711	533×534×709	622×534×711	
	WxDxH	inch	14-1/2×21×23-1/2	17-1/2×21×23-1/2	21×21×23-1/2	21×21×27-1/2	24-1/2×21×28	21×21×27-1/2	24-1/2×21×28	
<b>Packing Dimension</b>	WxDxH	mm	450×665×660	520×665×645	610×665×670	610×665×775	705×665×770	610×665×775	705×665×770	
	WxDxH	inch	17-3/4×26-1/8×26-1/8	17-5/8×26-1/8×25-3/8	20×26-1/8×26-3/8	24×26×30-1/2	27-3/4×26-1/8×30-1/4	24×26×30-1/2	27-3/4×26-1/8×30-1/4	
<b>Net/Gross Weight</b>			kg	30.2/35	27.3/31.3	27.3/31.3	30.2/35	39.3/44.6	30.2/35	39.3/44.6
			lbs	67/77	60/69	60/69	67/77	87/98	67/77	87/98

# Ideal for Multi-family Homes

Inverter heat Pump & Ceiling/Wall Mounted Air Handler System



## CORE FEATURES OF WALL & CEILING MOUNTED AIR HANDLERS

SEER2 Up to  
**19.3**

EER2 Up to  
**12.1**

HSPF4 Up to  
**10.8**



**1.5-3 Tons**

**A** 1.5-2tons: 20-1/4"×15-3/4"×36-1/2" **B** 2.5-3 tons: 22"×19"×40"

SEER2 Up to  
**18.0**

EER2 Up to  
**12.0**

HSPF4 Up to  
**10.0**




**1.5-3 Tons**

**A** 1.5 tons: 43-1/2"×23-3/8"×10-7/8" **B** 2 tons: 49-1/8"×23-3/8"×10-7/8"  
**C** 2.5 tons: 55-1/4"×23-3/8"×10-7/8" **D** 3 tons: 62-1/8"×23-3/8"×10-7/8"




# ADVANCED COMPONENTS

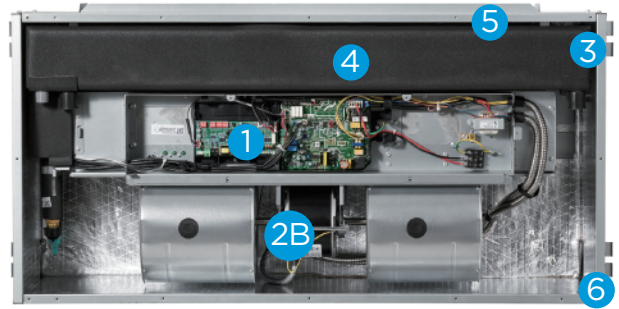

- 1 Compatible with 485 or 24V: automatically identifying the control mode, no need for manual conversion.
- 2 A: Constant CFM ECM motor provides consistent airflow up to 0.8 in. w.c.  
B: Constant torque ECM motor provides sufficient airflow of up to 0.8 in. w.c.;
- 3 Electronic expansion valve (EEV) control: better throttling for more highly efficient operation.
- 4 Optional auxiliary heat kits available up to 10kw
- 5 All-Aluminum Coil
- 6 Quiet Operation - inverter system runs at significantly lower dB(A) level

## EASY TO SERVICE


### Wall-Mounted Air Handler



**Easy-to-Access Design**  
Simply remove two screws for access to the error code display




**Slide-Track Design**  
Easily remove the evaporate coil through the slide track from the front side



**Easy-to-Maintain Design**  
Easily take out the electrical board & fan motor without the need to disassemble the evaporate




**Slide-Out Design**  
A single action to insert or remove the filter




**Full Front Access**  
No screws on the side


### Ceiling-Mounted Air Handler




Conveniently access the electrical board from the bottom of the unit



Simply remove two screws to access the error code display



Easily remove the fan & motor as well as the electrical board & heater assembly



Additional lock holds PCB cover in place



# Wall mounted AHU Extreme Heat\_Specification Up to 19.3 SEER2

Model	Indoor Unit		MAWHE-H18B-2A	MAWHE-H24B-2A	MAWHE-H30B-2A	MAWHE-H36B-2A
	Outdoor Unit		MOIHE-H18B-2A	MOIHE-H24B-2A	MOIHE-H30B-2A	MOIHE-H36B-2A
<b>Performance</b>						
Power Supply	IDU	V, Ph, Hz	115/208/230, 1, 60	115/208/230, 1, 60	115/208/230, 1, 60	115/208/230, 1, 60
	ODU	V, Ph, Hz	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
SEER2 (AHRI 210/240 - 2023)	Cooling Capacity	Btu/h	18,000	22,000	30,000	36,000
	Heating Capacity	Btu/h	19,000	24,000	31,000	37,000
	SEER2	Btu/W	19.3	17.5	17.5	16.8
	EER2	Btu/W	12.1	11.7	11.7	11.2
	HSPF4	Btu/W	10.8	10.5	10.2	9.6
Heating at 5°F (-15°C)	Rated capacity	Btu/h	18,000	19,000	29,000	36,000
	COP	W/W	2.1	1.96	2.00	1.8
<b>Indoor unit</b>						
Air Flow Volume	Turbo/Hi/Mi/Lo/Si	CFM	618/577/530/489/489	824/759/695/630/630	989/895/806/712/712	1189/1083/971/865/865
Noise Level	Turbo/Hi/Mi/Lo/Si	dB(A)	48/47/45/39/39	53/51/48/38/38	51/50/48/36/36	51/51/48/37 /37
Net Dimension	WxDxH	mm	515×399×928	515×399×928	559×483×1017	559×483×1017
	WxDxH	inch	20-1/4×15-3/4×36-1/2	20-1/4×15-3/4×36-1/2	22×19×40	22×19×40
Packing Dimension	WxDxH	mm	580×495×1090	580×495×1090	625×580×1193	625×580×1193
	WxDxH	inch	22-7/8×19-1/2×42-7/8	22-7/8×19-1/2×42-7/8	24-5/8×22-7/8×47	24-5/8×22-7/8×47
Net/Gross Weight		kg	40/49.5	40/49.5	49.4/60.3	49.4/60.3
		lbs	88/109	88/109	109/133	109/133

# Wall mounted AHU Regular Heat\_Specification Up to 18 SEER2

Model	Indoor Unit		MAWHE-H18B-2A	MAWHE-H24B-2A	MAWHE-H30B-2A	MAWHE-H36B-2A
	Outdoor Unit		MOIBE-H18B-2A	MOIBE-H24B-2A	MOIBE-H30B-2A	MOIBE-H36B-2A
<b>Performance</b>						
Power Supply	IDU	V, Ph, Hz	115/208/230, 1, 60	115/208/230, 1, 60	115/208/230, 1, 60	115/208/230, 1, 60
	ODU	V, Ph, Hz	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
SEER2 (AHRI 210/240 - 2023)	Cooling Capacity	Btu/h	18,000	24,000	30,000	36,000
	Heating Capacity	Btu/h	18,000	25,000	31,000	37,000
	SEER2	Btu/W	18.5	17.4	18.6	16.7
	EER2	Btu/W	11.5	10.8	11	10.2
	HSPF4	Btu/W	9.4	10.4	8.7	9.3
Heating at 5°F (-15°C)	Rated capacity	Btu/h	11,400	19,400	18,700	29,200
	COP	W/W	2.1	1.96	1.99	1.99
<b>Indoor unit</b>						
Air Flow Volume	Turbo/Hi/Mi/Lo/Si	CFM	618/577/530/489/489	824/759/695/630/630	989/895/806/712/712	1189/1083/971/865/865
Noise Level	Turbo/Hi/Mi/Lo/Si	dB(A)	48/47/45/39/39	53/51/48/38/38	51/50/48/36/36	51/51/48/37 /37
Net Dimension	WxDxH	mm	515×399×928	515×399×928	559×483×1017	559×483×1017
	WxDxH	inch	20-1/4×15-3/4×36-1/2	20-1/4×15-3/4×36-1/2	22×19×40	22×19×40
Packing Dimension	WxDxH	mm	580×495×1090	580×495×1090	625×580×1193	625×580×1193
	WxDxH	inch	22-7/8×19-1/2×42-7/8	22-7/8×19-1/2×42-7/8	24-5/8×22-7/8×47	24-5/8×22-7/8×47
Net/Gross Weight		kg	40/49.5	40/49.5	49.4/60.3	49.4/60.3
		lbs	88/109	88/109	109/133	109/133

# Pancake Extreme Heat\_Specification

## Up to 19 SEER2

Model	Indoor Unit		MAPHE-H18B-2A	MAPHE-H24B-2A	MAPHE-H30B-2A	MAPHE-H36B-2A
	Outdoor Unit		MOIHE-H18B-2A	MOIHE-H24B-2A	MOIHE-H30B-2A	MOIHE-H36B-2A
<b>Performance</b>						
Power Supply	IDU	V, Ph, Hz	115/208/230, 1, 60	115/208/230, 1, 60	115/208/230, 1, 60	115/208/230, 1, 60
	ODU	V, Ph, Hz	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
SEER2 (AHRI 210/240 - 2023)	Cooling Capacity	Btu/h	18,000	23,000	30,000	36,000
	Heating Capacity	Btu/h	18,000	20,600	32,600	36,000
	SEER2	Btu/W	16.8	18.0	16.8	16.8
	EER2	Btu/W	12.0	11.7	11.7	11.0
	HSPF4	Btu/W	9.7	8.5	10.0	9.5
Heating at 5°F (-15°C)	Rated capacity	Btu/h	18,000	24,000	34,000	37,000
	COP	W/W	1.80	1.80	1.96	1.90
<b>Indoor unit</b>						
Air Flow Volume	Turbo/Hi/Mi/Lo/Si	CFM	600/564/529/488	823/758/694/629	988/894/805/541	1176/1000/794/617
Noise Level	Turbo/Hi/Mi/Lo/Si	dB(A)	54/50/46	55/52/46	58/56/47	60/56/53
Net Dimension	WxDxH	mm	1098×593×278	1248×593×278	1403×593×278	1578×593×278
	WxDxH	inch	43-1/2×23-3/8×10-7/8	49-1/8×23-3/8×10-7/8	55-1/4×23-3/8×10-7/8	62-1/8×23-3/8×10-7/8
Packing Dimension	WxDxH	mm	1200×680×345	1350×680×345	1505×680×345	1680×680×345
	WxDxH	inch	47-1/4×26-3/4×13-5/8	53-1/8×26-3/4×13-5/8	59-1/4×26-3/4×13-5/8	66-1/8×26-3/4×13-5/8
Net/Gross Weight		kg	51/56.6	55.6/61.9	61.6/68.2	65.7/71.1
		lbs	112/125	123/136	136/150	145/157

# Pancake Regular Heat\_Specification

## Up to 16.5 SEER2

Model	Indoor Unit		MAPHE-H18B-2A	MAPHE-H24B-2A	MAPHE-H30B-2A	MAPHE-H36B-2A
	Outdoor Unit		MOIBE-H18B-2A	MOIBE-H24B-2A	MOIBE-H30B-2A	MOIBE-H36B-2A
<b>Performance</b>						
Power Supply	IDU	V, Ph, Hz	115/208/230, 1, 60	115/208/230, 1, 60	115/208/230, 1, 60	115/208/230, 1, 60
	ODU	V, Ph, Hz	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
SEER2 (AHRI 210/240 - 2023)	Cooling Capacity	Btu/h	18,000	24,000	30,000	36,000
	Heating Capacity	Btu/h	18,000	24,000	30,000	36,000
	SEER2	Btu/W	16.5	18.0	16.4	15.8
	EER2	Btu/W	11.0	11.0	9.6	9.4
	HSPF4	Btu/W	8.6	8.5	7.8	8.1
Heating at 5°F (-15°C)	Rated capacity	Btu/h	11,000	21,600	19,100	25,500
	COP	W/W	1.80	1.80	1.94	1.92
<b>Indoor unit</b>						
Air Flow Volume	Turbo/Hi/Mi/Lo/Si	CFM	600/564/529/488	823/758/694/629	988/894/805/541	1176/1000/794/617
Noise Level	Turbo/Hi/Mi/Lo/Si	dB(A)	54/50/46	55/52/46	58/56/47	60/56/53
Net Dimension	WxDxH	mm	1098×593×278	1248×593×278	1403×593×278	1578×593×278
	WxDxH	inch	43-1/2×23-3/8×10-7/8	49-1/8×23-3/8×10-7/8	55-1/4×23-3/8×10-7/8	62-1/8×23-3/8×10-7/8
Packing Dimension	WxDxH	mm	1200×680×345	1350×680×345	1505×680×345	1680×680×345
	WxDxH	inch	47-1/4×26-3/4×13-5/8	53-1/8×26-3/4×13-5/8	59-1/4×26-3/4×13-5/8	66-1/8×26-3/4×13-5/8
Net/Gross Weight		kg	51/56.6	55.6/61.9	61.6/68.2	65.7/71.1
		lbs	112/125	123/136	136/150	145/157

# Easy to Control Your EVOX Systems

Multiple control methods to maximize your convenience.

Wired Controller  
Built-in WiFi



Remote Control



Mobile Phone



Voice



Central Control



Remote On/Off



24V Thermostat Control

## MIDEA SMARTHOME APP

### Your Evolving System



#### Future upgrade


Over-the-air update technology (OTA) for future comfort enhancements



#### Check your System's Health

It's like a doctor's appointment for your HVAC

### Your Smart Home Comfort Manager



#### Set your schedule


Customize the schedule of your unit before start your week



#### Set your location

Automatically adjust comfort levels based on your proximity.

#### Set your sleep preference

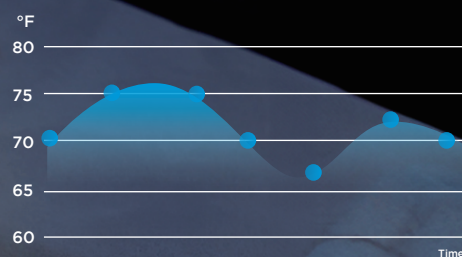

Customize the hourly temperature setting in advance or simply switch to the recommended temperature curve to enjoy a restful sleep.



*make yourself at home*



[www.mideacomfort.us](http://www.mideacomfort.us)



[www.mideacomfortna.ca](http://www.mideacomfortna.ca)